

# R70VT Line Matching Transformer

## 70 Volt to 8 Ohm Line Matching Transformer


The Current Audio R70VT adapts our 8 Ohm speakers for use with multi-speaker 70-volt commercial distributed public address and sound systems. It features a high power, low insertion loss, wide frequency response quality line matching design.

The transformer has multiple primary taps of 30-15-8-4 watts with the secondary at 8 Ohms.

The transformer is constructed of audio caliber laminations. It has a very low insertion loss and has a frequency response of 40-16kHz.



The unit has two mounting holes for easy attachment to locations on the speaker or any hard surface.

With our limited 5 year warranty you are assured years of superior trouble-free operation.

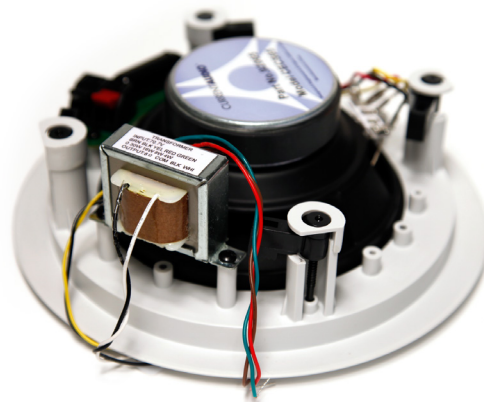

### SPECIFICATIONS

Brown	70 Volt Line Common
Black	30 Watt Tap
Yellow	16 Watt Tap
Red	8 Watt Tap
Green	4 Watt Tap
Black	8 Ohm Side Common (-)
White	8 Ohm Side Plus (+)



Part Number	92070
Manual URL	<a href="http://www.currentaudio.com">www.currentaudio.com</a>
Accessories	Any 8 Ohm Speaker

